

UFO HIGH BAY 3 WATTAGES(100W/150W/200W) LOOX

OVERVIEW

An industrial ceiling-mounted lighting solution designed for large spaces with elevated mounting heights. It provides broad and consistent illumination to improve visibility across demanding work areas. Its main advantage is dependable area coverage with a compact form suited to continuous everyday operation. Ideal for factories, warehouses, production halls, logistics centers and large workshops.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LIU30002003	3000K, إضاءة هاي باي, Dimmable Driver	100/150/200	15000-30000	>150 ±10%	>0.95	60°/90°/110°	>70	65

TECHNICAL INFORMATION

Frequency(Hz)	50/60
Voltage(V)	120-277
Life Time(Hrs)	100,000
IK	08
Protection Class	PC
Ambient Temperature(Ta)	-40°C~+45°C
THD	<15%
Product Face Size (mm)	323*323*155
Product Weight (gr)	1800

DIMENSION DRAWINGS

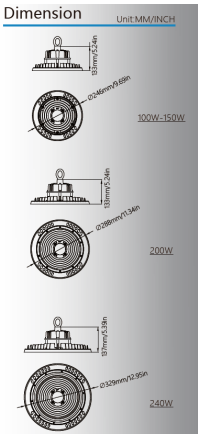

GENERAL INFORMATION

Body Material	ADC12 die-cast aluminum
Diffuser	polycarbonate lens
Reflector	Improve lighting by up to 20% and reduce light loss
Driver Brand	SOSEN/MOSO
Chip Brand	SMD2835
Light Source	SMD2835

APPLICATION AREAS

- Workshops & Maintenance Facilities: Large service bays, repair areas and high-ceiling workspaces
- Warehouses & Logistics Centers: Storage aisles, loading zones and distribution halls
- Industrial & Storage Facilities: Factories, production halls and assembly areas