



UFO HIGH BAY 3 WATTAGES(120W/160W/200W) LOOX PLUS

OVERVIEW

An industrial ceiling-mounted lighting solution designed for large spaces with elevated mounting heights. It provides broad and consistent illumination to improve visibility across demanding work areas. Its main advantage is dependable area coverage with a compact form suited to continuous everyday operation. Ideal for factories, warehouses, production halls, logistics centers and large workshops.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LIU32DM2003	3000K, إضاءة هاي باي, Dimmable Driver	200W	30000	150	>0.95	110°	80	65


TECHNICAL INFORMATION

Frequency(Hz)	50-60
Voltage(V)	220-250
Life Time(Hrs)	50000
IK	08
Surge Protection(KV)	06
Protection Class	I
Sensor	Optional
Ambient Temperature(Ta)	-40 °C ..+50°C
Product Face Size (mm)	300*H163
Product Weight (gr)	2200


INSTRUCTION

Instruction Manual	

PHOTOMETRIC DIAGRAMS

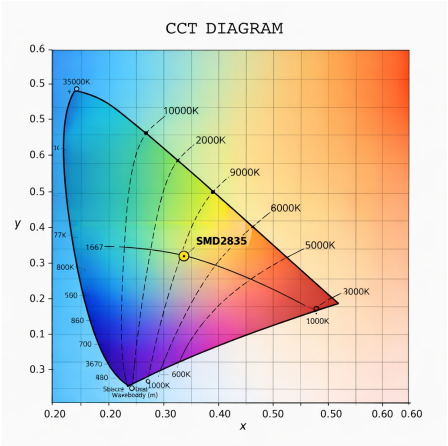



Chromaticity / CCT diagram

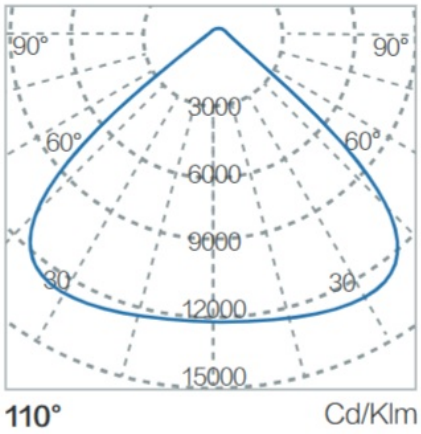

Beam angle / polar diagram

DIMENSION DRAWINGS

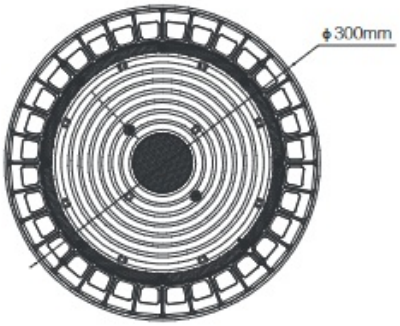

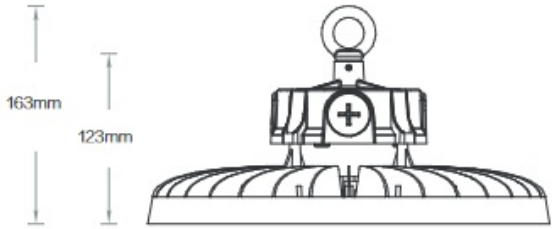

GENERAL INFORMATION

Body Material	ADC12 die-cast aluminum
Mounting Type	Suspended / Eye-Ring
Driver Brand	Moso/Philips
Chip Brand	Lumiled/Cree
Light Source	SMD
Cable & Gland Type	30cm AC cable 3-core

APPLICATION AREAS

- Workshops & Maintenance Facilities: Large service bays, repair areas and high-ceiling workspaces
- Industrial & Storage Facilities: Factories, production halls and assembly areas