



COB DOWNLIGHT 10W LOOX PRO

OVERVIEW

A compact recessed LED fixture with a black trim and a deep-set lens that directs light downward. The recessed lens helps shield the light source from direct view at wider angles. It can be used for general or accent lighting in residential, hospitality, and retail interiors


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LPD20L10101	3CCT, Black, إضاءة نازلة داون لايت	10	860	86	>0.5	60°	>80	20

TECHNICAL INFORMATION


Frequency(Hz)	50
Input Voltage(VAC)	165-265
Life Span(Hrs)	30000
Ambient temperature(Ta)	-20 , +50
Operating temperature	-20 , +50
Product Face Size (mm)	85x48
Product Weight (gr)	128
Energy Usage	A+
Lumen Maintenance(lm)	860

PHOTOMETRIC DIAGRAMS

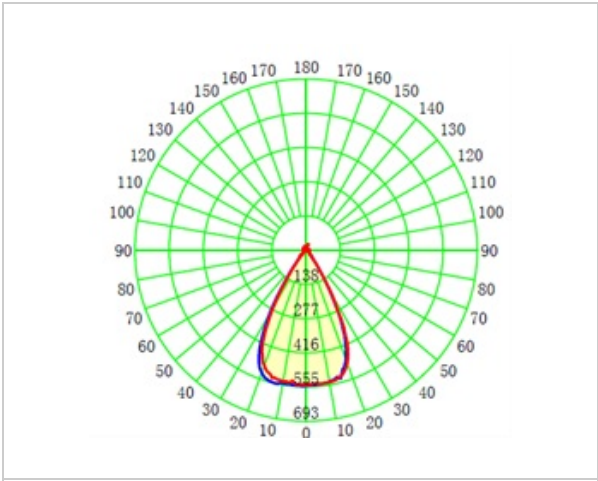

Beam angle / polar diagram

DIMENSION DRAWINGS

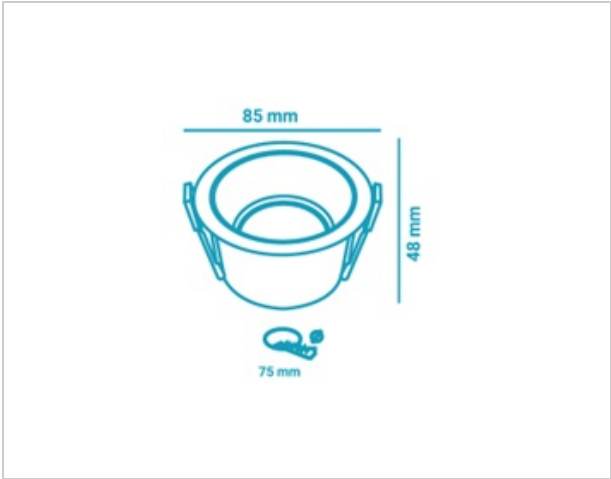

GENERAL INFORMATION

Body Material	Aluminum
Diffuser	PC
Mounting Type	Recessed
Cut Size	75

APPLICATION AREAS

- Retail Store — Merchandise display tables, display plinths, checkout counters.
- Hotel — Reception counters, lobby display tables, guest-room luggage benches
- Residential — Entryway consoles, kitchen islands, decorative display niches.