





# DOWNLIGHT 7W D5 LUMINATION

## OVERVIEW

A round recessed ceiling fixture for general indoor lighting. Its textured diffuser softens the downward light, while the slim white trim sits close to the ceiling for a clean finish. It suits circulation areas, small seating spaces, and guest-room entrances.

## PRODUCT VARIANTS & TECHNICAL DATA

| Code | Type / Description | Wattage(W) | Total Luminous Flux(lm) | Luminous Efficacy(lm/W) | Power Factor(pf) | CRI (Ra) | IP Rating |
|---|---|---|---|---|---|---|---|
| UPD1D510071 | 3CCT, ROUND, إضاءة نازلة داون لايت, White | 7 | 450 | 75 | >0.5 | 80 | 20 |

## TECHNICAL INFORMATION

| | |
|---|---|
| **Frequency(Hz)** | 50-60 |
| **Input Voltage(VAC)** | 220-260 |
| **Life Span(Hrs)** | 25000 |
| **Sensor** | No |
| **Product Face Size (mm)** | 90*25 |
| **Product Weight (gr)** | 35 |
| **Energy Usage** | A+ |
| **Lumen Maintenance(lm)** | 595 |

## INSTRUCTION

| | |
|---|---|
| **Instruction Manual** | |

## DIMENSION DRAWINGS

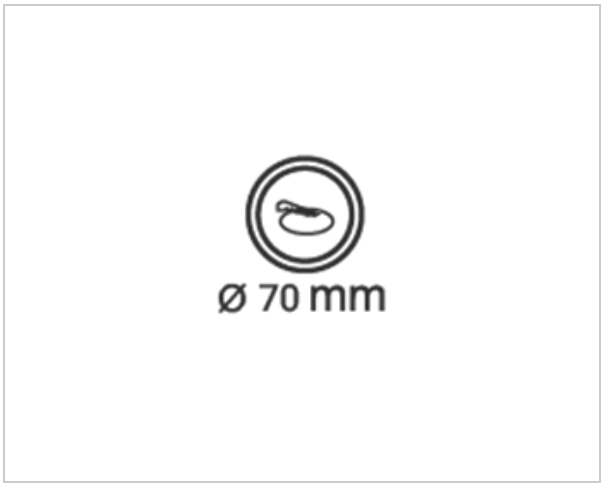


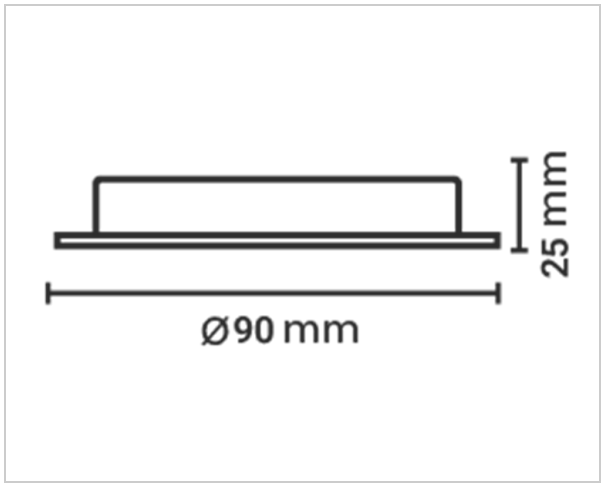

## GENERAL INFORMATION

| | |
|---|---|
| **Body Material** | PP (Fire retardant) |
| **Diffuser** | PC |
| **Mounting Type** | Recessed |
| **Cut Size(mm)** | 70 |

## APPLICATION AREAS

- Residential Interiors — Entrance foyers, hallways, dressing areas.
- Hotels — Guest-room entrances, wardrobe alcoves, elevator lobbies
- Art Galleries — Visitor waiting alcoves, entrance foyers, corridors between exhibition rooms.

2 YEARS GUARANTEE
ISO 9001:2015
ISO 14001:2015
CE