



# A BULB 10W LUMINATION

## OVERVIEW

Product benefits
– Energy savings with high system efficacy: up to 85 lm/W
– High quality aluminum housing
– Luminaire designed for easy maintenance
– Professional optics with wide beam angle of 180°
– Good color consistency
– Good color rendering

## PRODUCT VARIANTS & TECHNICAL DATA

| Code | Type / Description | Wattage(W) | Total Luminous Flux(lm) | Luminous Efficacy(lm/W) | Power Factor(pf) | Beam Angle | CRI (Ra) | IP Rating |
|---|---|---|---|---|---|---|---|---|
| ULA60200103 | 2700K, لمبة إضاءة | 10 | 850 | 80 | >0.5 | 220° | >70 | 20 |

## TECHNICAL INFORMATION

| | |
|---|---|
| **Frequency(Hz)** | 50 |
| **Input Voltage(V)** | 220-260 |
| **Life Span(Hrs)** | 25000 |
| **IK** | |
| **Surge Protection(KV)** | |
| **Protection Class** | |
| **SDCM** | <6 |
| **Sensor** | No |
| **Ambient Temperature(Ta)** | |
| **Operating Temperature** | |
| **UGR** | |
| **Product Face Size (mm)** | 108*60 |
| **Product Weight (gr)** | 24 |
| **Energy Usage** | A |
| **Lumen Maintenance(lm)** | 850 |

## PHOTOMETRIC DIAGRAMS

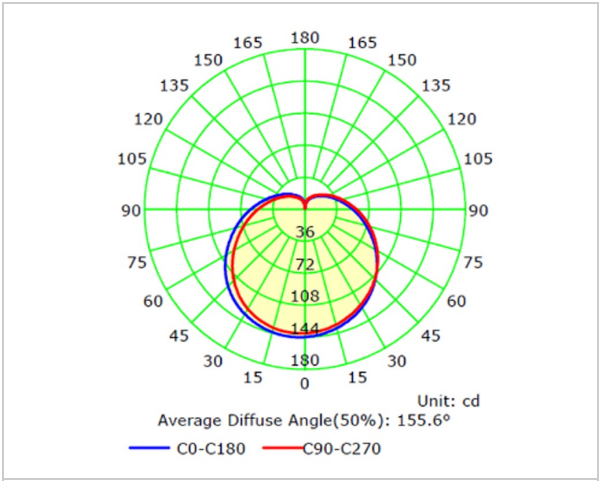


*Beam angle / polar diagram*

## DIMENSION DRAWINGS

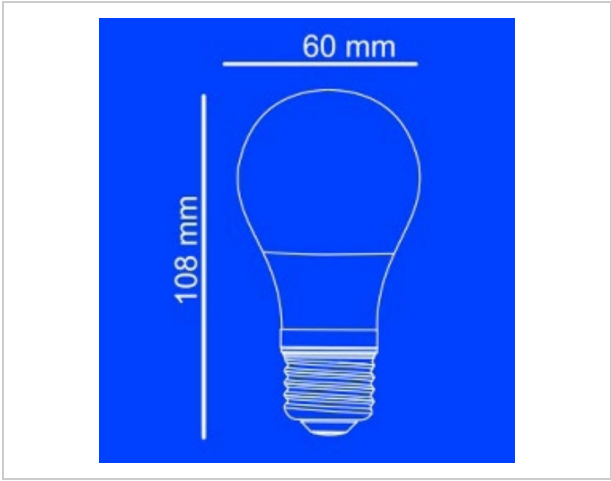

## GENERAL INFORMATION

| | |
|---|---|
| **Body Material** | PA+PC |
| **Diffuser** | |
| **Reflector** | |
| **Mounting Type** | Socket |
| **Cut Size(mm)** | |
| **Driver Brand** | |
| **Chip Brand** | |
| **LED Type** | |

## APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings







