







# BULKHEAD LIGHT 25W ROUND LOOX

## OVERVIEW

A durable emergency wall-mounted LED luminaire designed to provide reliable general and backup illumination for circulation and utility areas. It delivers uniform, comfortable light for everyday use while supporting continued visibility during power interruptions through its integrated emergency function. Its main advantage is the combination of robust outdoor protection, efficient performance, and emergency lighting capability in one compact fixture. Suitable for residential common areas, hospitality, and light-industrial environments.

## PRODUCT VARIANTS & TECHNICAL DATA

| Code | Type / Description | Wattage(W) | Total Luminous Flux(lm) | Luminous Efficacy(lm/W) | Power Factor(pf) | Beam Angle | CRI (Ra) | IP Rating |
|---|---|---|---|---|---|---|---|---|
| LCLMSIPW254 | 4000K, Emergency & MW Sensor | 25W | 2625lm | 105 | >0.95 | 120° | >80 | 65 |


## TECHNICAL INFORMATION

| | |
|---|---|
| **Frequency(Hz)** | 50 |
| **Input Voltage(V)** | 180-265 |
| **Life Span(Hrs)** | 50000 |
| **IK** | 08 |
| **Sensor** | Emergency + Microwave Sensor |
| **Ambient Temperature(Ta)** | -20℃+85℃ |
| **Product Face Size (mm)** | ∅280*H70 |
| **Product Weight (gr)** | 812 |
| **Energy Usage** | A+ |
| **Lumen Maintenance(lm)** | 2625 |

## INSTRUCTION


| | |
|---|---|
| **Instruction Manual** | |

## PHOTOMETRIC DIAGRAMS

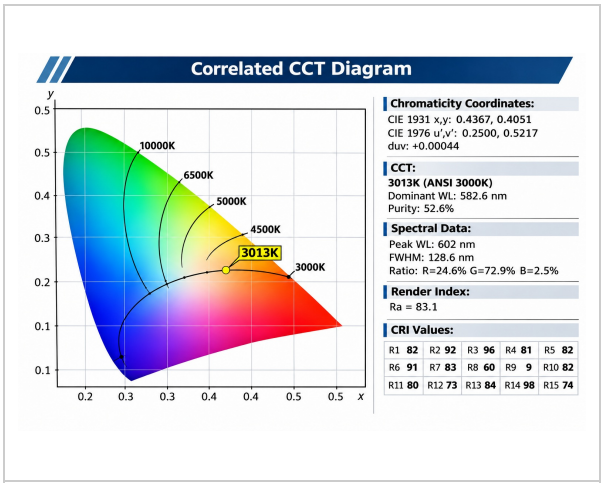


*Chromaticity / CCT diagram*

## DIMENSION DRAWINGS

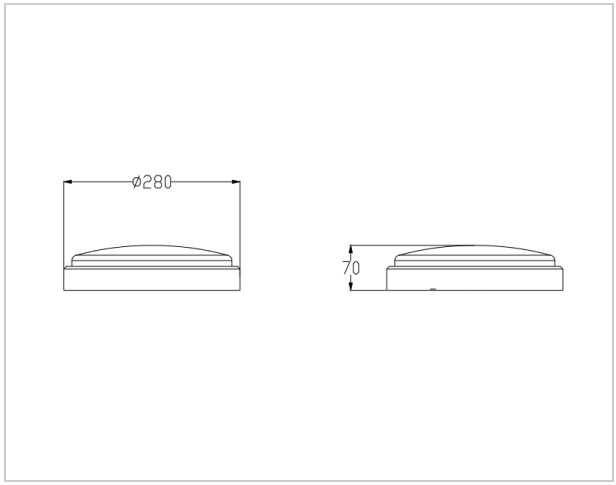

## GENERAL INFORMATION

| | |
|---|---|
| **Body Material** | Anti-UV PC |
| **Diffuser** | Anti-UV PC |
| **Mounting Type** | Ceiling - Wall |
| **Cut Size(mm)** | ∅280*H70 |
| **LED Type** | SMD |

## APPLICATION AREAS

- Retail & Showrooms: Displays, shelves, product walls, boutiques
- Hotels & Hospitality: Receptions, corridors, lounges, guest areas
- Residential: Living rooms, kitchens, dining areas, corridors, feature walls

