







DOWNLIGHT 25W SERIES ARTIVIA - 150H1 LOOX PLUS

OVERVIEW

The ARTIVIA Recessed Downlight is an architectural luminaire designed to provide comfortable, balanced illumination across medium-sized interior areas while maintaining a clean ceiling appearance. Its recessed optical design supports controlled light distribution and improved visual comfort, making it well suited to hospitality, office, retail, commercial and residential interiors.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LD18510G254	4000K, Gray, Down Light, On/Off Driver	25W	2500	100	>0.9	50°	>90	54


TECHNICAL INFORMATION

Frequency	50-60 Hz
Input Voltage	220-260 VAC
Life Span	50000 H
Protection class	Class II
SDCM	≤ 2
Ambient temperature(Ta)	-15℃+55℃
Operating temperature	-15℃+45℃
UGR	<17
Product Face Size (mm)	Ø180 × H97 mm
Product Weight (gr)	585
Energy Usage	A+
Lumen Maintenance (L70)	2500


INSTRUCTION

Instruction Manual	

PHOTOMETRIC DIAGRAMS

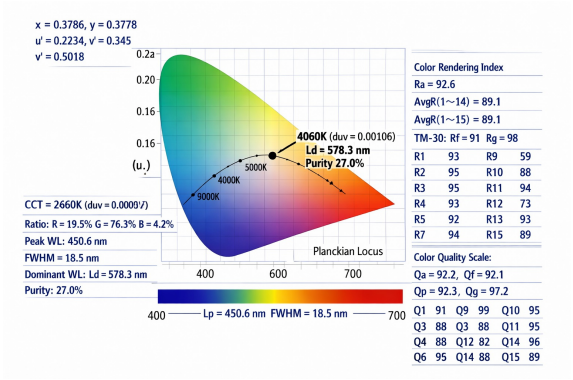


Chromaticity / CCT diagram



Beam angle / polar diagram

DIMENSION DRAWINGS

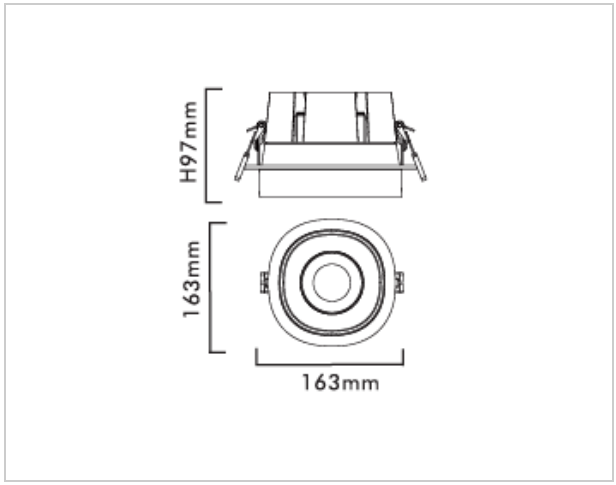

GENERAL INFORMATION

Body Material	Die-Cast Aluminum
Diffuser	PC
Reflector	PC
Mounting Type	Recessed
Cut Size	Ø130 mm
Driver Brand	Eaglerise/Philips
Chip Brand	Osram/Bridgelux
LED Type	COB

APPLICATION AREAS

- Hospitality: Hotel Corridors, Lift Lobbies, Reception Areas, Waiting Zones, Guest-Floor Circulation
- Residential Building: Entrances, Hallways, Dressing Areas, Feature Walls, Artwork Areas, etc.
- Commercial Buildings: Reception Areas, Entrance Halls, Internal Corridors, Waiting Areas, Lift Lobbies

