



# UFO HIGH BAY 3 WATTAGES(120W/160W/200W) LOOX PLUS

## OVERVIEW

An industrial ceiling-mounted lighting solution designed for large spaces with elevated mounting heights. It provides broad and consistent illumination to improve visibility across demanding work areas. Its main advantage is dependable area coverage with a compact form suited to continuous everyday operation. Ideal for factories, warehouses, production halls, logistics centers and large workshops.

## PRODUCT VARIANTS & TECHNICAL DATA

| Code | Type / Description | Wattage(W) | Total Luminous Flux(lm) | Luminous Efficacy(lm/W) | Power Factor(pf) | Beam Angle | CRI (Ra) | IP Rating |
|---|---|---|---|---|---|---|---|---|
| LIU32DM2009<br>LIU32DM2003<br>LIU32DM2004<br>LIU32DM2006 | 3CCT DIP Switch / 3000K / 4000K / 6500K, Highbay Light, Dimmable Driver | 200W | 30000 | 150 | >0.95 | 110° | 80 | 65 |


## TECHNICAL INFORMATION

| | |
|---|---|
| **Frequency(Hz)** | 50-60 |
| **Voltage(V)** | 220-250 |
| **Life Time(Hrs)** | 50000 |
| **IK** | 08 |
| **Surge Protection(KV)** | 06 |
| **Protection Class** | I |
| **Sensor** | Optional |
| **Ambient Temperature(Ta)** | -40 °C ..+50°C |
| **Product Face Size (mm)** | 300*H163 |
| **Product Weight (gr)** | 2200 |


## INSTRUCTION

| | |
|---|---|
| **Instruction Manual** | |

## PHOTOMETRIC DIAGRAMS

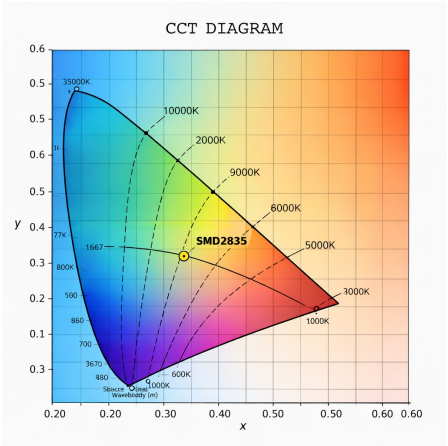




*Chromaticity / CCT diagram*

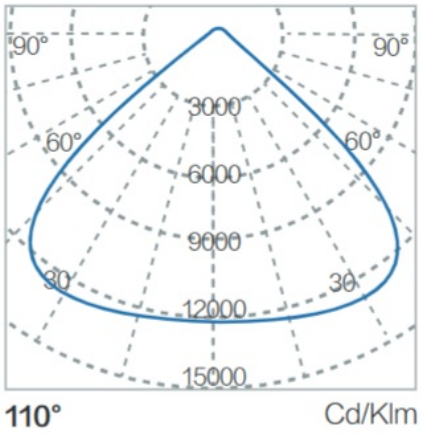


*Beam angle / polar diagram*

## DIMENSION DRAWINGS

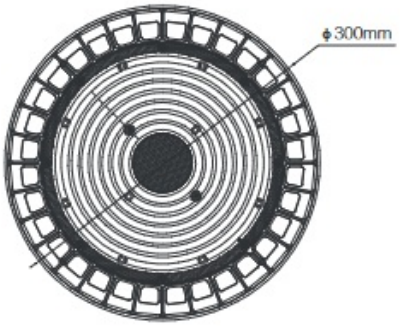
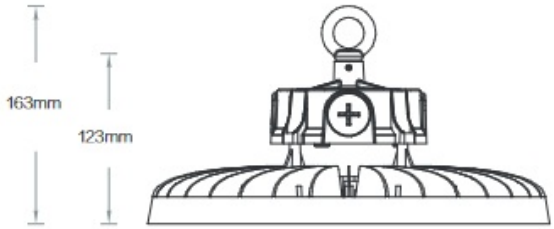
## GENERAL INFORMATION

| | |
|---|---|
| **Body Material** | ADC12 die-cast aluminum |
| **Mounting Type** | Suspended / Eye-Ring |
| **Driver Brand** | Moso/Philips |
| **Chip Brand** | Lumiled/Cree |
| **Light Source** | SMD |
| **Cable & Gland Type** | 30cm AC cable 3-core |

## APPLICATION AREAS

- Workshops & Maintenance Facilities: Large service bays, repair areas and high-ceiling workspaces
- Industrial & Storage Facilities: Factories, production halls and assembly areas