



SURFACE PANEL 30W LUMINATION

OVERVIEW

Features:

- Easy to install on any ceiling without additional accessories.
- High-efficiency LED surface panel with uniform light distribution.
- High color Rendering Index


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
UPP20010303 UPP20010304 UPP20010306	2700K / 4000K / 6500K, ROUND, Panel Light	30	2700	90	>0.5	120°	>70	20

TECHNICAL INFORMATION


Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	25000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	<5
Sensor	No
Ambient Temperature(Ta)	
Operating Temperature	
UGR	
Product Face Size (mm)	295*24
Product Weight (gr)	Round: 111 Square: 152.4
Energy Usage	A
Lumen Maintenance(lm)	2700


PHOTOMETRIC DIAGRAMS

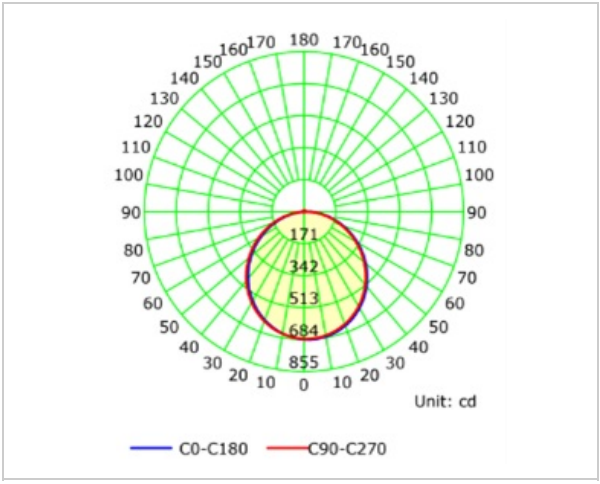

Beam angle / polar diagram

DIMENSION DRAWINGS

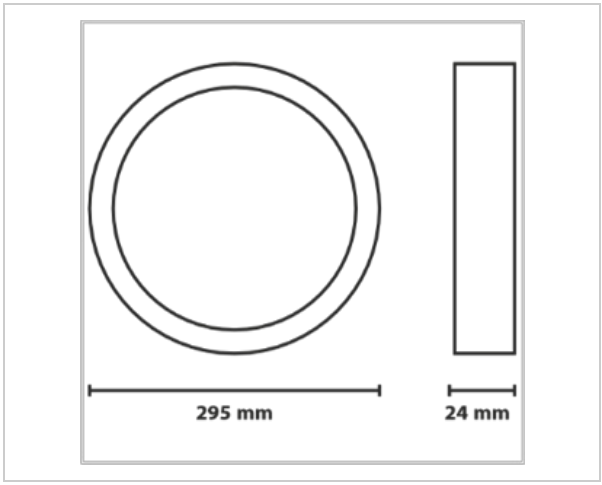

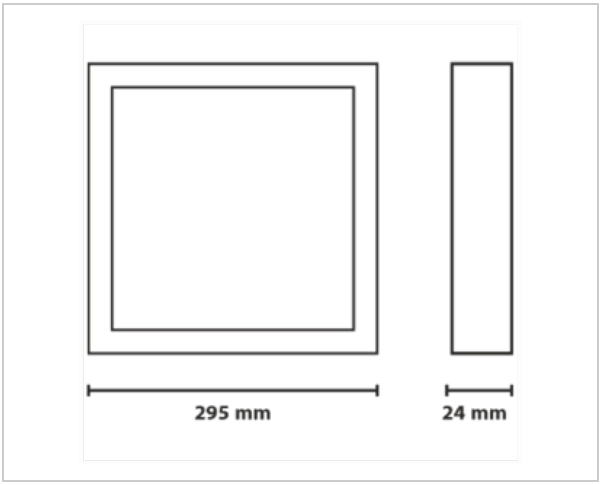

GENERAL INFORMATION

Body Material	Iron
Diffuser	PP
Reflector	
Mounting Type	Surface
Cut Size(mm)	
Driver Brand	
Chip Brand	
LED Type	

APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings
- Garages and Workshops