



PANEL 40W SANA 2 LOOX

OVERVIEW

A surface-mounted LED ceiling light available in round and square designs, created to provide broad and uniform general illumination. Its diffused surface helps reduce harsh brightness and supports a comfortable visual environment, while the clean, minimal form integrates easily with different interiors. It is well suited to corridors, lobbies, stairwells, common areas and utility spaces in residential, commercial and public buildings.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LPP2SN10401 LPP2SN10403 LPP2SN10404 LPP2SN10406	3CCT / 2700K / 4000K / 6500K, ROUND, Panel Light	40	4000	100	>0.5	180°	>80	20

TECHNICAL INFORMATION

Frequency	50
Input Voltage	185-265
Life Span	25000
SDCM	<4
Warranty	3
Operating temperature	+50°C ---- -20°C
Product Face Size (mm)	225*44
Product Weight (gr)	270
Energy Usage	A+

INSTRUCTION

Instruction Manual	

DIMENSION DRAWINGS

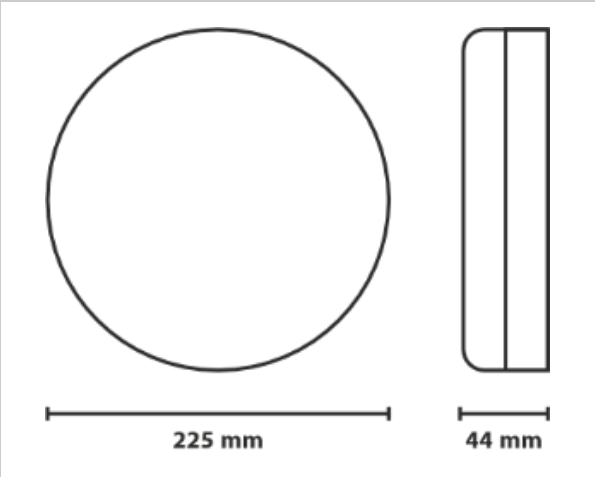

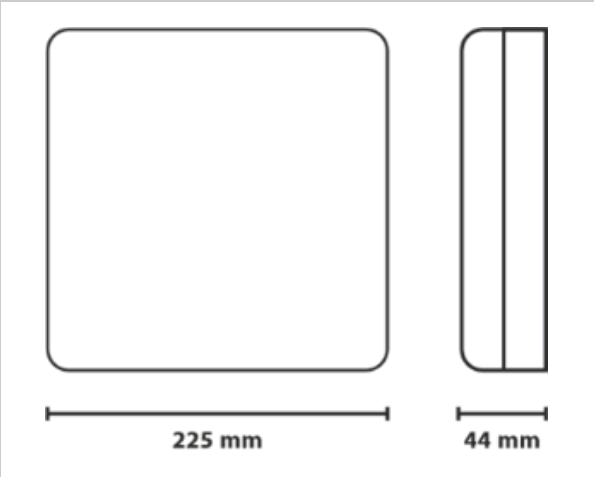

GENERAL INFORMATION

Body Material	Iron
Diffuser	PP
Mounting Type	Surface

APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings