

PANEL 60W SANA 2 LUMINATION

OVERVIEW

Features:

• Easy surface installation, suitable for both residential and commercial spaces.

• Modern frameless LED panel with a slim and elegant surface-mounted design.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
UPP2SN10601 UPP2SN10603 UPP2SN10604 UPP2SN10606	3CCT / 2700K / 4000K / 6500K, ROUND, Panel Light	60	4800	80	>0.5	180°	>70	20


TECHNICAL INFORMATION

Frequency	50
Input Voltage	220-260
Life Span	25000
IK	
Surge Protection	
Protection class	
SDCM	<6
Sensor	No
Warranty	1
Ambient temperature(Ta)	
Operating temperature	
UGR	
Product Face Size (mm)	300*44
Product Weight (gr)	473
Energy Usage	A+
Lumen Maintenance	4800

INSTRUCTION


Instruction Manual	


PHOTOMETRIC DIAGRAMS

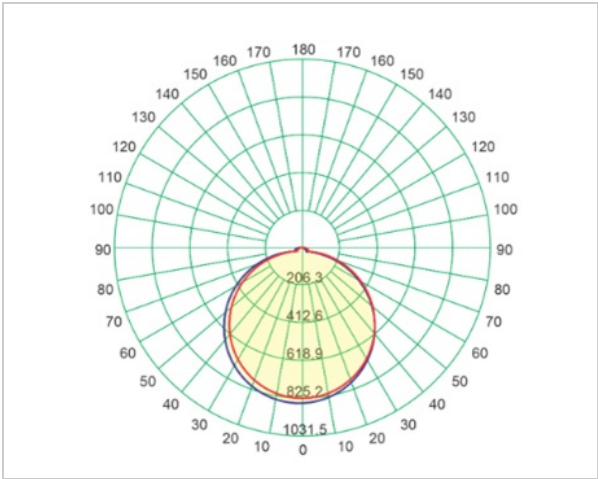

Beam angle / polar diagram

DIMENSION DRAWINGS

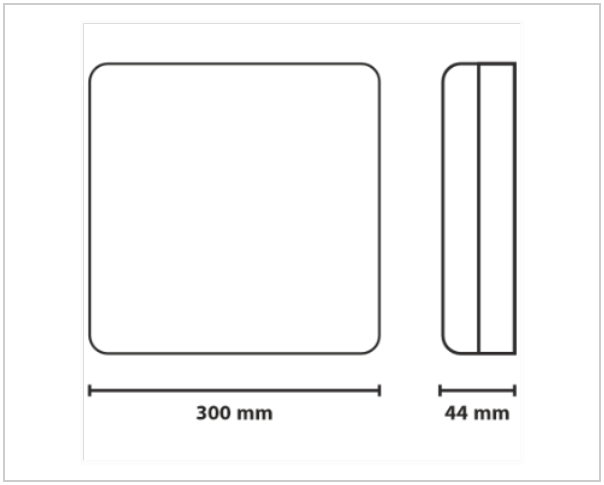

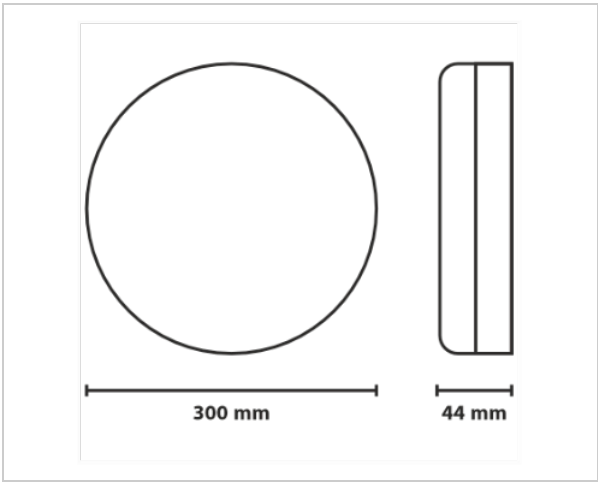

GENERAL INFORMATION

Body Material	Iron
Diffuser	PP
Reflector	
Mounting Type	Surface
Cut Size	
Driver Brand	
Chip Brand	
LED Type	

APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings
- Garages and Workshops