



CRYSTAL DOWNLIGHT 7W LOOX PRO

OVERVIEW

A round recessed ceiling light that directs illumination onto surfaces below. Its textured lens shapes the light, while the flush black trim provides a defined border without protruding from the ceiling. It suits display and counter lighting in boutiques, showrooms, and hotels.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	CRI (Ra)	IP Rating
LPD1L0C1077 LPD1L0C1079 LPD1L0C1073 LPD1L0C1074 LPD1L0C1076	3CCT / 3CCT DIP Switch / 3000K / 4000K / 6500K, Black, Down Light	7	560	80	>0.5	>80	20


TECHNICAL INFORMATION

Frequency(Hz)	50-60
Input Voltage(VAC)	185-240
Life Span(Hrs)	25000
Sensor	No
Product Face Size (mm)	95x40
Product Weight (gr)	104
Energy Usage	A+
Lumen Maintenance(lm)	560

INSTRUCTION


Instruction Manual	

PHOTOMETRIC DIAGRAMS

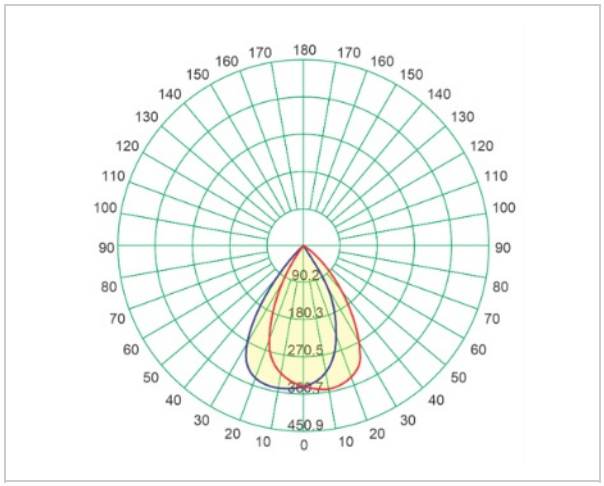

Beam angle / polar diagram

DIMENSION DRAWINGS

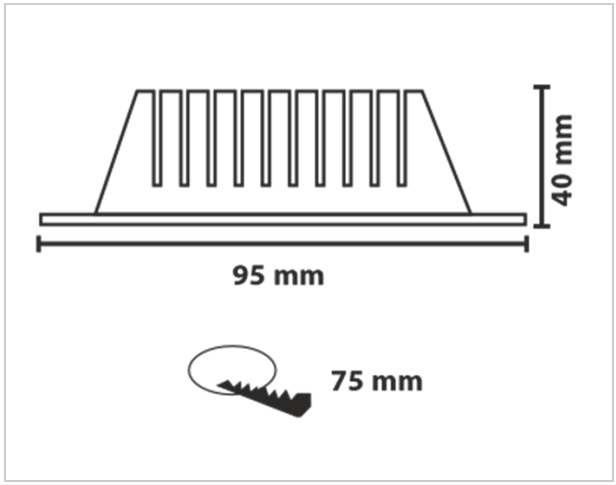

GENERAL INFORMATION

Body Material	Iron
Reflector	PC
Mounting Type	Recessed
Cut Size	75

APPLICATION AREAS

- Accessories Boutiques — Display islands, product presentation tables, sales counters.
- Interior Design Showrooms — Material sample tables, display plinths, consultation counters.
- Hotels — Reception desks, lobby display tables, guest-room minibar counters.