





WALL LIGHT OL-FCD SERIES WHITE LUMINATION

OVERVIEW

This decorative wall light features a unique design and delivers powerful illumination with 30W of power . With an IP65 rating, it is suitable for both indoor and outdoor use, making it ideal for hallways, entrances, patios, and more.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)
UDB0WOLFCD3 UDB0WOLFCD6	2700K / 6500K, Prismatic, Wall Light, Wall Light	60	90	>0.5	120°	>80

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	15000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	
Sensor	NO
Ambient Temperature(Ta)	-20 , +50
Operating Temperature	-20 , +50
UGR	
Product Face Size (mm)	208*175*58
Product Weight (gr)	204
Energy Usage	A
Lumen Maintenance(lm)	

PHOTOMETRIC DIAGRAMS

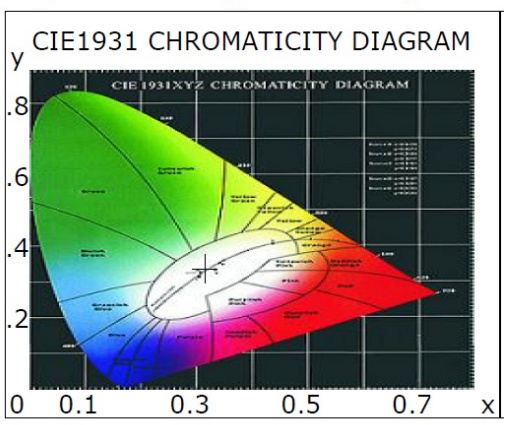

Chromaticity / CCT diagram

DIMENSION DRAWINGS

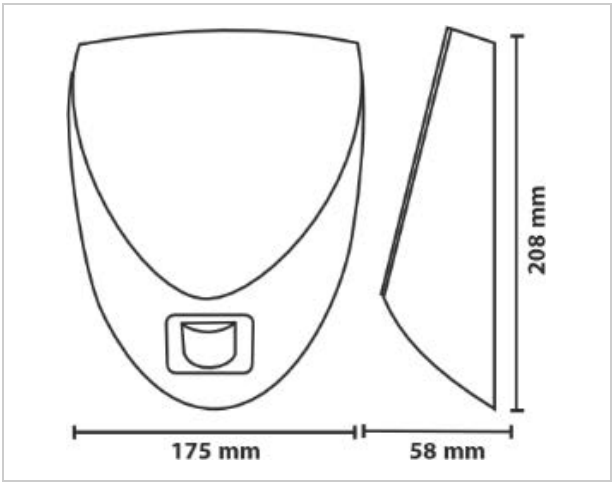

GENERAL INFORMATION

Body Material	PP+PS
Diffuser	
Reflector	
Mounting Type	Wall Mounted
Cut Size(mm)	
Driver Brand	
Chip Brand	
LED Type	

APPLICATION AREAS

- Retail & Showrooms
- Hotels & Hospitality
- Warehouses
- Residential
- Commerical Buildings
- Garages and Workshops
- Industrial & Storage Facilities

ISO 9001:2005 ISO 14001:2015 CE