



FROSTED CANDLE 7W LOOX

OVERVIEW

Features:

- Warm and cool light options available
- High color Rendering Index

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Beam Angle	CRI (Ra)	Power Factor(pf)	IP Rating
LLCCF100073 LLCCF100076	LOOX, 7W, 2700K / 6500K, E14, 100*37 mm, Bulb Light	7	630	90	220°	>80	>0.5	20


TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	25000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	<6
Sensor	No
Ambient Temperature(Ta)	
Operating Temperature	
UGR	
Product Face Size (mm)	36*99
Product Weight (gr)	21
Energy Usage	A+
Lumen Maintenance(lm)	630

APPLICATION AREA


Schools	
Car Parking	
Warehouses	
Residential Building	
Commerical Buildings	


PHOTOMETRIC DIAGRAMS

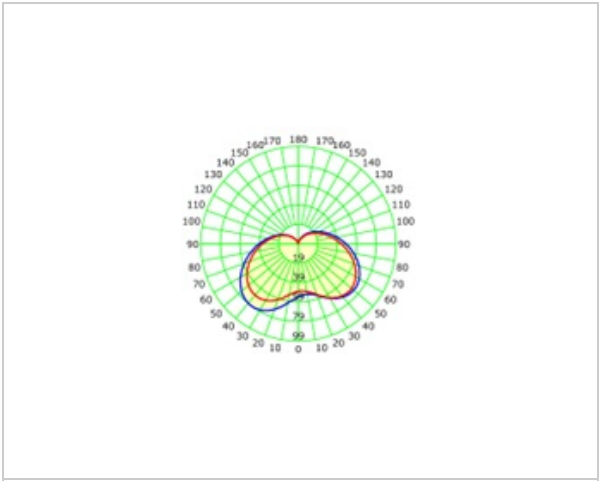

Beam angle / polar diagram

DIMENSION DRAWINGS

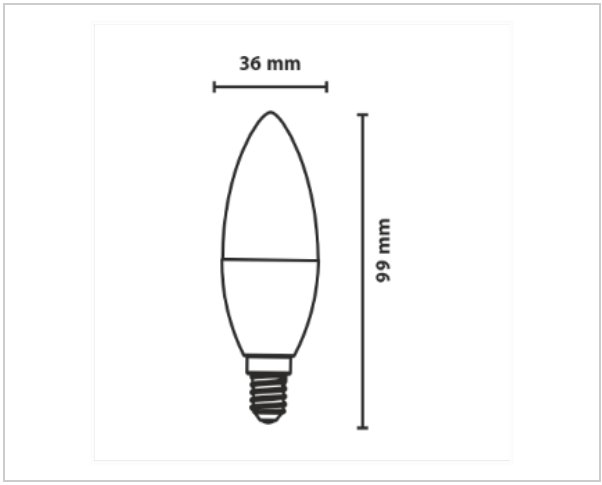

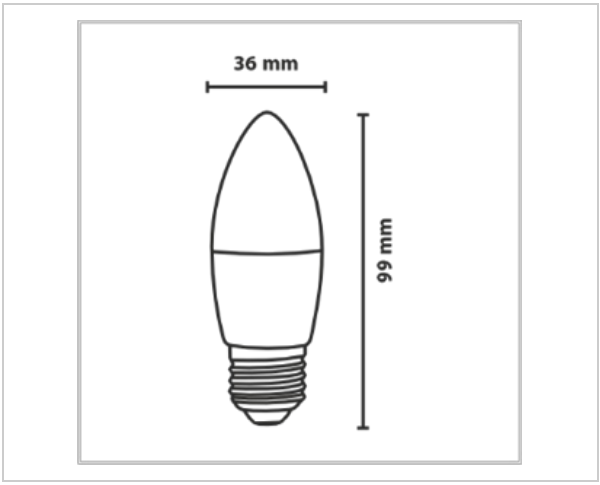

GENERAL INFORMATION

Body Material	PA + PC
Diffuser	
Reflector	
Mounting Type	Socket
Cut Size(mm)	
Driver Brand	
Chip Brand	
LED Type	

2 YEARS GUARANTEE
ISO 9001:2005
ISO 14001:2015
CE