



A BULB 10W LUMINATION

OVERVIEW

Product benefits
– Energy savings with high system efficacy: up to 85 lm/W
– High quality aluminum housing
– Luminaire designed for easy maintenance
– Professional optics with wide beam angle of 180°
– Good color consistency
– Good color rendering

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
ULA60200103 ULA60200104 ULA60200106	2700K / 4000K / 6500K, Bulb Light	10	850	80	>0.5	220°	>70	20

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	25000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	<6
Sensor	No
Ambient Temperature(Ta)	
Operating Temperature	
UGR	
Product Face Size (mm)	108*60
Product Weight (gr)	24
Energy Usage	A
Lumen Maintenance(lm)	850

PHOTOMETRIC DIAGRAMS

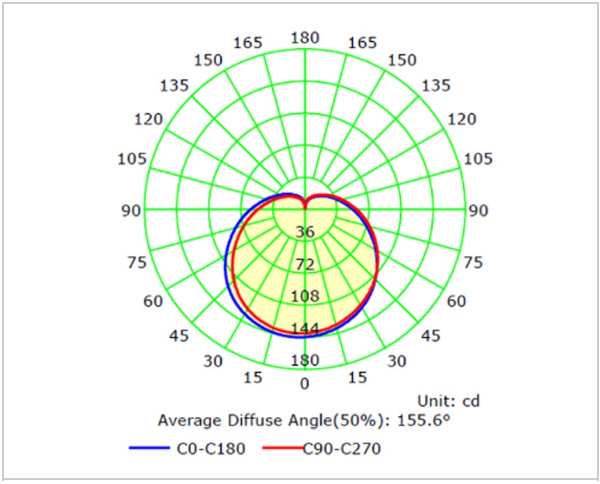

Beam angle / polar diagram

DIMENSION DRAWINGS

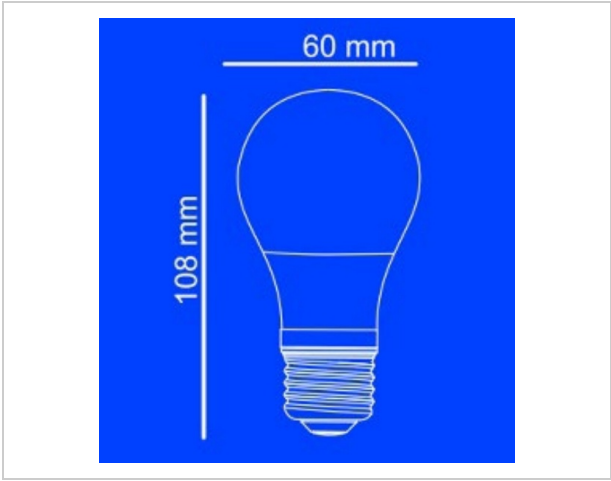

GENERAL INFORMATION

Body Material	PA+PC
Diffuser	
Reflector	
Mounting Type	Socket
Cut Size(mm)	
Driver Brand	
Chip Brand	
LED Type	

APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings







