



PANEL 60W 60*60 BACKLIGHT LUMINATION

OVERVIEW

A recessed ceiling lighting solution designed to provide broad and evenly distributed illumination across indoor spaces. Its diffused light surface supports visual comfort and helps minimise uneven brightness. The clean square form integrates neatly into grid ceilings for a simple and professional finish. Suitable for offices, reception areas, retail spaces and other general commercial interiors.


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
UPP1B620603 UPP1B620604 UPP1B620606	2700K / 4000K / 6500K, SQUARE, Panel Light	60	90	>0.5	120°	>80	20

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	25000
SDCM	<3
Sensor	No
Product Face Size (mm)	595*595
Product Weight (gr)	1000
Energy Usage	A

DIMENSION DRAWINGS

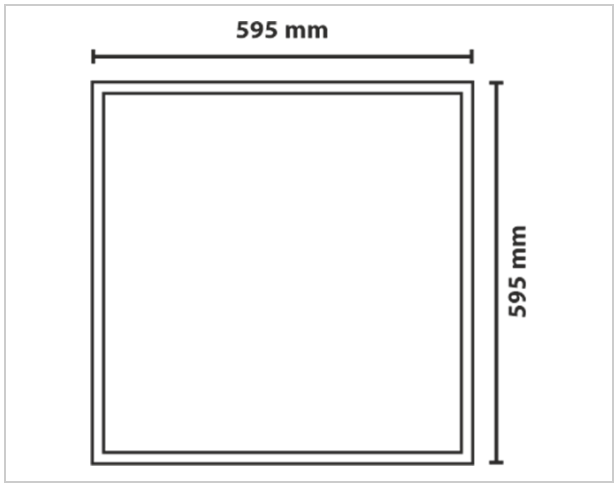

GENERAL INFORMATION

Body Material	Iron + PVC
Mounting Type	Recessed
Cut Size	575*575

APPLICATION AREAS

- Storage Facilities: Warehouses and distribution areas
- Commercial Buildings: Large showrooms and retail halls
- Industrial & Storage Facilities: Production and assembly areas