





# NEON STRIP LIGHT FLEXIBLE 120° ONE SIDE IP67 ANTI-UV 16*16MM 220V LOOX

## OVERVIEW

3D Bending Neon
Top&Side Bending integrated
high-performance architectural lighting solution designed to deliver a smooth, dot-free neon effect with a wide 120° light-emitting angle.
With an IP67 waterproof rating and UV-resistant materials, this neon strip is built to withstand rain, sunlight, dust, and harsh environmental conditions, ensuring long-lasting performance.

## PRODUCT VARIANTS & TECHNICAL DATA

| Code | Type / Description | Wattage(W) | Total Luminous Flux(lm) | Luminous Efficacy(lm/W) | CRI (Ra) | IP Rating | Beam Angle |
|---|---|---|---|---|---|---|---|
| LR151S92113<br>LR151S92114 | 3000K / 4000K, 10m/Roll, 220V, Strip Light | 12W | 800 | 70 | >80 | 67 | 120° |


## TECHNICAL INFORMATION

| | |
|---|---|
| **Power Factor(Pf)** | >0.9 |
| **Voltage(V)** | 220-250 |
| **Frequency(Hz)** | 50 |
| **IK** | 7 |
| **SDCM** | <6 |
| **Life Time(Hrs)** | 30000 |
| **Total Luminous Flax(lm)** | 800 |
| **Product Size(mm)** | 16*16 |

## INSTRUCTION

| | |
|---|---|
| **Instruction Manual** | |

## DIMENSION DRAWINGS

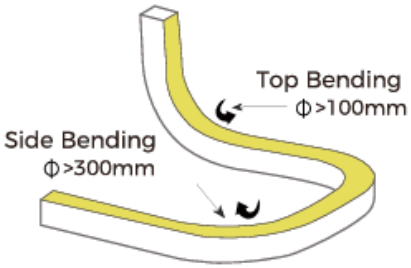




## GENERAL INFORMATION

| | |
|---|---|
| **PCB Base (Copper or Iron)** | Copper |
| **PCB Width(mm)** | 10 |
| **Thickness(mm)** | 35+35 |
| **Cutting Length(M/CM)** | 50 |
| **Cut Size(M/CM)** | 5 |
| **LED Qty(pcs)** | 140 |
| **DOB** | |
| **Mounting Type** | AL Profile |

## APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Garages and Workshops
- Industrial & Storage Facilities

