



COB DOWNLIGHT 7W E6 LUMINATION

OVERVIEW

A round recessed LED fixture that directs light downward onto selected surfaces. The reflector helps concentrate light where it’s needed, while the flush trim keeps the ceiling uncluttered. It suits retail displays, hospitality counters, and residential accent lighting.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	CRI (Ra)	IP Rating
UPD2E610073 UPD2E610076	Lumination, 2700K / 6500K, 90*52 mm, 1 Year, Down Light	7	460	65	>0.5	>70	20

TECHNICAL INFORMATION

Frequency(Hz)	50-60
Input Voltage(VAC)	220-260
Life Span(Hrs)	25000
Sensor	No
Ambient Temperature(Ta)	-20° , +50°
Operating Temperature	-20° , +50°
Product Face Size (mm)	91x37
Product Weight (gr)	60
Energy Usage	A+
Lumen Maintenance(lm)	460

DIMENSION DRAWINGS

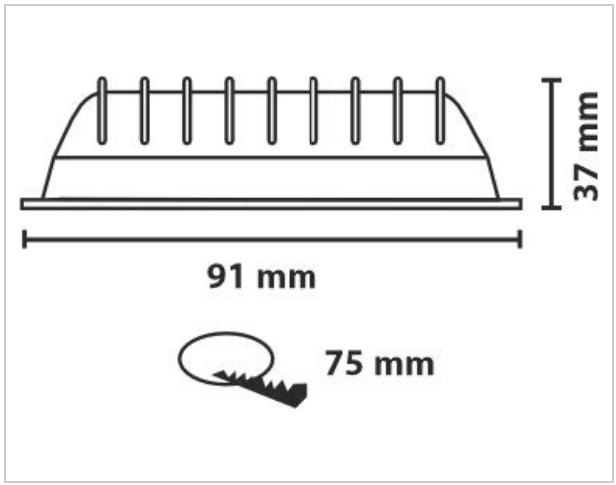

GENERAL INFORMATION

Body Material	Die-Cas Aluminum
Diffuser	PC
Mounting Type	Recessed Ceiling
Cut Size	75
LED Type	COB

APPLICATION AREAS

- Residential Interiors — Reading nooks, entry consoles, decorative niches.
- Boutique Retail — Product display tables, merchandise plinths, checkout counters.
- Hotel Guest Rooms — Luggage benches, minibar counters, wardrobe alcoves.