





LED MOVABLE SMD SPOT LIGHT 8W BLACK E3 LUMINATION

OVERVIEW

Compact adjustable spotlight with energy-saving SMD LED technology, ideal for modern focused lighting applications.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
UPD2E31L083 UPD2E31L086	3000K / 6500k, Black, Down Light	8	560	70	>0.5	120°	>70	20

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(VAC)	220-260
Life Span(Hrs)	25000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	2>
Sensor	No
Ambient Temperature(Ta)	-20° , +50°
Operating Temperature	-20° , +50°
UGR	
Product Face Size (mm)	90*45
Product Weight (gr)	90
Energy Usage	A+
Lumen Maintenance(lm)	560

DIMENSION DRAWINGS

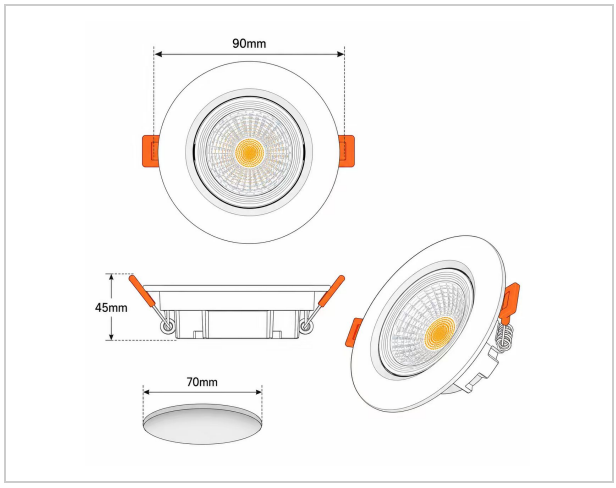

GENERAL INFORMATION

Body Material	Plastic
Diffuser	
Reflector	
Mounting Type	Recessed
Cut Size	70-75
Driver Brand	
Chip Brand	
LED Type	SMD

APPLICATION AREAS

- Artwork or Feature Wall
- Product Display Wall
- Reception and Decorative Display Area
- Residential Building
- Commerical Buildings
- Industrial & Storage Facilities

2 YEARS GUARANTEE
ISO 9001:2005
CE
ISO 14001:2015