



60*60 SURFACE 2-ROW GRILL PANEL 40W LOOX

OVERVIEW

A surface-mounted ceiling light designed to provide clear and comfortable illumination across indoor spaces. Its dual-row grille distributes light evenly while helping to reduce glare and improve visual comfort. The clean square design offers a practical solution where recessed installation is not suitable. Ideal for offices, classrooms, clinics, reception areas and commercial spaces.


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)
LPP1B62G403 LPP1B62G404 LPP1B62G406	3000K / 4000K / 6500K, Panel Light	40	4000	100	>0.9	120°	>80

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	220-260
Life Span(Hrs)	50000
Sensor	No
Operating Temperature	-20° , +50°
Product Face Size (mm)	595*595*27
Product Weight (gr)	2400
Energy Usage	A+

DIMENSION DRAWINGS

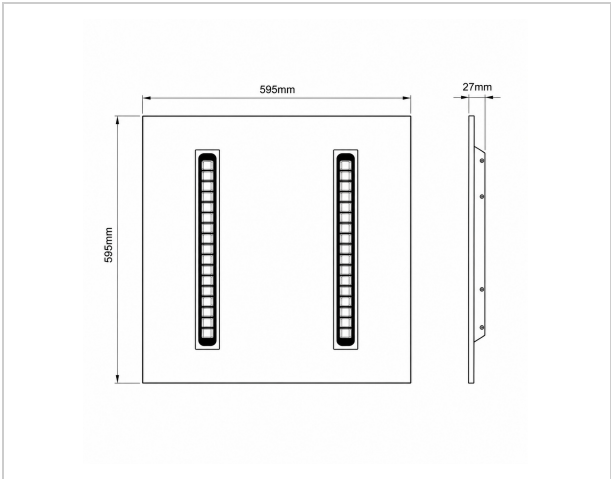

GENERAL INFORMATION

Mounting Type	Surface
Driver Brand	Lifud
Chip Brand	Sanan

APPLICATION AREAS

- Schools: classrooms, libraries and administrative offices.
- Commercial Buildings: workspaces, meeting rooms and reception areas.