

GLASS PANEL 7W LUMINATION

OVERVIEW

Features:

- High-efficiency LED surface panel with uniform light distribution.
- High color Rendering Index

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
UPP1GL10071 UPP1GL10076	3CCT / 6500K, Down Light	7	490	70	>0.5	120°	>70	20

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(VAC)	220-260
Life Span(Hrs)	25000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	<6
Sensor	No
Ambient Temperature(Ta)	
Operating Temperature	
UGR	
Product Face Size (mm)	109*27
Product Weight (gr)	45
Energy Usage	A+
Lumen Maintenance(lm)	490

INSTRUCTION

Instruction Manual	

PHOTOMETRIC DIAGRAMS

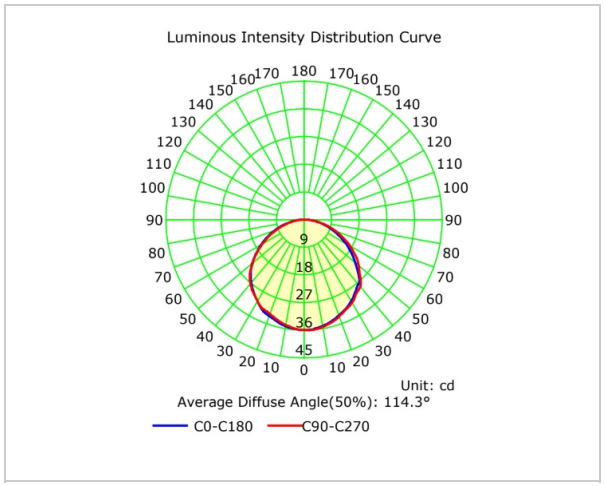

Beam angle / polar diagram

GENERAL INFORMATION

Body Material	
Diffuser	
Reflector	
Mounting Type	Recessed
Cut Size(mm)	70
Driver Brand	
Chip Brand	
LED Type	

APPLICATION AREAS

- Café — Window Seating
- Hotel Guest Room — Luggage Alcove