







FRAMELESS PANEL 40W WITH COLORFUL RING LOOX

OVERVIEW

Features:

• Easy surface installation, suitable for both residential and commercial spaces.

• Modern frameless LED panel with a slim and elegant surface-mounted design.


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LPP2CL10363 LPP2CL10364 LPP2CL10366	3000K / 4000K / 6500K, ROUND, Double Control, Black, Panel Light	40	3000	75	>0.5	120	>80	20

TECHNICAL INFORMATION

Frequency(Hz)	50
Input Voltage(V)	200-265
Life Span(Hrs)	30000
IK	
Surge Protection(KV)	
Protection Class	
SDCM	<6
Sensor	No
Ambient Temperature(Ta)	
Operating Temperature	
UGR	
Product Face Size (mm)	212*45
Product Weight (gr)	44
Energy Usage	A+
Lumen Maintenance(lm)	3000

DIMENSION DRAWINGS

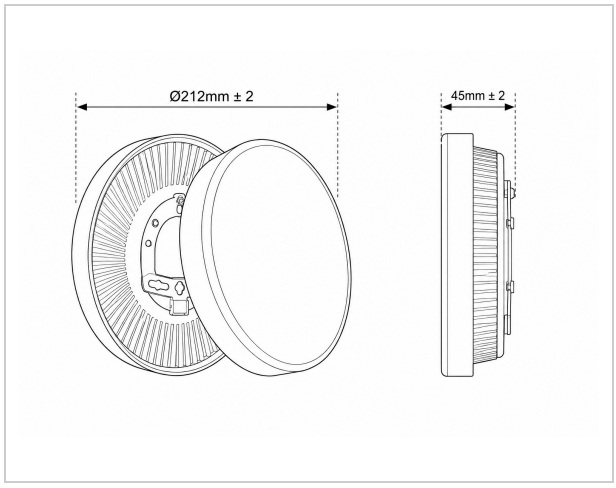

GENERAL INFORMATION

Body Material	Aluminium
Diffuser	PC
Reflector	
Mounting Type	Surface
Cut Size(mm)	
Driver Brand	
Chip Brand	MLS
LED Type	

APPLICATION AREAS

- Schools
- Car Parking
- Residential Building
- Commerical Buildings