



MAGNETIC HANGING BALL 10W M30 SERIES SURFACE LOOX

OVERVIEW

A decorative suspended luminaire featuring a distinctive half-black, half-opal spherical design for modern magnetic track systems. It provides soft, comfortable ambient illumination while adding a refined visual element to the interior. Its main advantage is the combination of flexible magnetic installation and contemporary decorative design. Suitable for residential, hospitality, commercial, and decorative interior applications.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LIMB30LS103 LIMB30LS104	3000K / 4000K, Black, Magnetic Light	10W	60	>0.5	110°	>90	20

TECHNICAL INFORMATION

Frequency(Hz)	50-60
Input Voltage(V)	48
Life Span(Hrs)	30000
SDCM	<3
Operating Temperature	-20° C , +50° C
Product Face Size (mm)	100
Product Weight (gr)	465.8
Energy Usage	A+

INSTRUCTION

Instruction Manual	

DIMENSION DRAWINGS

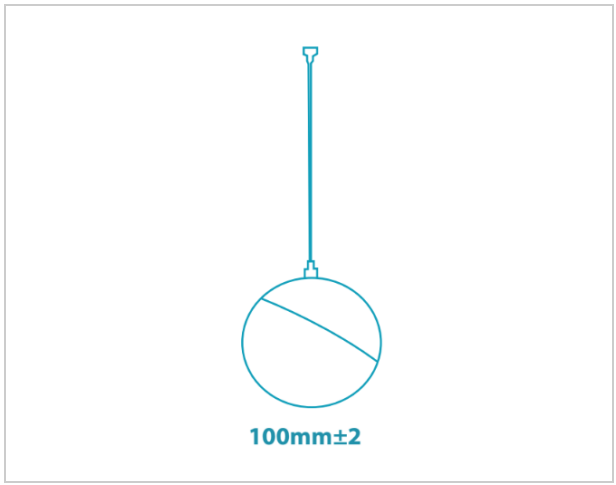

GENERAL INFORMATION

Body Material	Aluminum
Mounting Type	Surface
Chip Brand	Bridgelux

APPLICATION AREAS

- Retail & Boutiques: display tables, feature displays, premium product zones
- Residential Building: Dining spaces, majlis areas , decorative ceiling compositions
- Decorative Projects: Feature ceilings, architectural compositions, interior accent-lighting arrangements