

PANEL ADJUSTABLE 40W S2 LOOX

OVERVIEW

Features:

• Modern frameless LED panel with a slim and elegant surface-mounted design.

• Easy surface installation, suitable for both residential and commercial spaces.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LPP1S210403 LPP1S210404 LPP1S210406	2700K / 4000K / 6500K, ROUND, Panel Light	40	3520	88	>0.5	180°	>70	20

TECHNICAL DATA

Frequency	50
Voltage	185-265
Product Face Size (mm)	225
Product Weight (gr)	350
Life time	15000
Warranty	2 years
IK	
Surge Protection	
Protection class	
SDCM	<6
Sensor	No
Ambient temperature(Ta)	
UGR	

MATERIALS / TYPE

Body	Iron punching
Diffuser	PP
Reflector	
Mounting Type	Recessed
Driver Brand	
Chip Brand	
LED Type	

DIMENSION DRAWINGS

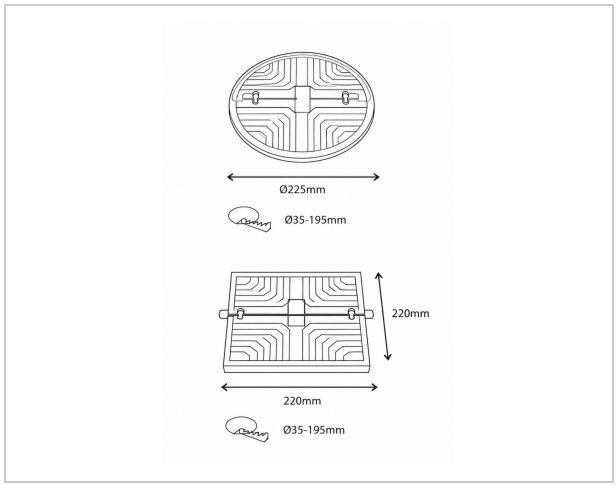

APPLICATION AREAS

- Schools
- Car Parking
- Warehouses
- Residential Building
- Commerical Buildings
- Garages and Workshops
- Industrial & Storage Facilities







