





COB FLOOD LIGHT 400W LX01 SERIES LOOX

OVERVIEW

An outdoor lighting solution designed for large, open spaces. It provides broad illumination to improve visibility across surrounding areas. Its durable construction supports everyday use in demanding outdoor environments. Suitable for industrial yards, parking areas, commercial premises and building façades.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LIF22004003 LIF22004004 LIF22004006	3000K / 4000K / 6500K, Flood Light	400	40000	100	>0.95	120°	>70	66


TECHNICAL INFORMATION

Frequency(Hz)	50-60
Voltage(V)	165-265
Life Time(hrs)	50000
IK	08
Surge Protection(KV)	4
Sensor	No
Operating Temperature	-20°, +50°
Product Face Size (mm)	630*360*81
Energy Label Grade	A+

INSTRUCTION


Instruction Manual	

PHOTOMETRIC DIAGRAMS

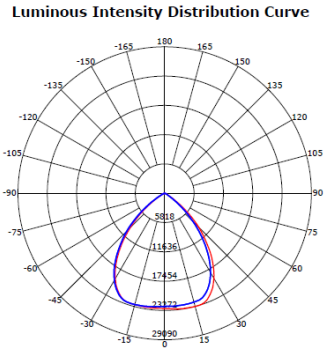

Beam angle / polar diagram

DIMENSION DRAWINGS

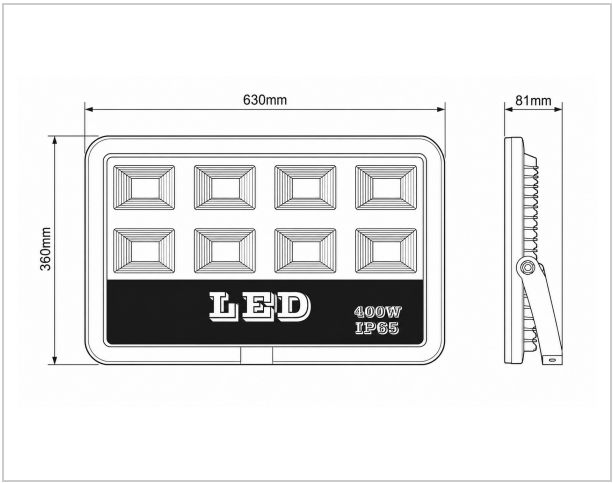

GENERAL INFORMATION

Body Material	Aluminum
Mounting Type	Pole top, wall
Chip Brand	Sanan

APPLICATION AREAS

- Hotels and Resorts: External Entrances, Parking Areas, etc.
- Commercial & Public Areas: parking areas, playgrounds, building façades and service areas
- Industrial & Logistics Areas: Outdoor Yards, Loading Areas, etc.