



PANEL 50W 60*60 BACKLIGHT PUSH TYPE LUMINATION

OVERVIEW

Panel 50w 60*60 Backlight LUMINATION is a high-performance lighting solution designed to deliver bright, uniform, and comfortable illumination for commercial and residential applications. Featuring advanced backlit LED technology, the panel provides efficient light distribution with reduced glare and minimal shadows.


PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)
UPP1B620503 UPP1B620504 UPP1B620506	2700K / 4000K / 6500K, SQUARE, Panel Light, Normal	50W	5000LM	100LM/W	>0.5	120	>80

TECHNICAL INFORMATION

Frequency(Hz)	50Hz
Input Voltage(V)	220-260V
Life Span(Hrs)	25000Hrs
Product Face Size (mm)	600*600mm Push Type
Energy Usage	A
Lumen Maintenance(lm)	5000LM

DIMENSION DRAWINGS

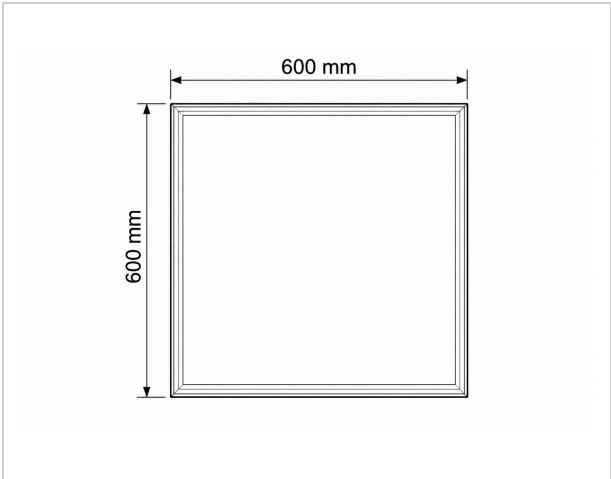

GENERAL INFORMATION

Body Material	Iron Frame
Mounting Type	Push Type
Cut Size	600*600mm

APPLICATION AREAS

- Schools
- Car Parking
- Storage Facilities
- Residential Building
- Commercial Buildings
- Garages and Workshops
- Industrial & Storage Facilities