







FLOOD LIGHT 100W LOOX PRO

OVERVIEW

A practical outdoor lighting solution designed to provide broad and consistent illumination. It improves visibility and security around exterior spaces while delivering reliable, energy-efficient performance with minimal maintenance. Suitable for building entrances, parking areas, garages, workshops, gardens and other outdoor applications.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LIF10G01009 LIF10G01006	3CCT DIP Switch / 6500K, Flood Light, Gray, With Bracket	100W	10000	100	0.9	120°	>80	65


TECHNICAL INFORMATION

Frequency(Hz)	50-60
Voltage(V)	180-265
Life Time(hrs)	30000
IK	06
Surge Protection(KV)	4
Sensor	No
Ambient Temperature(Ta)	-20℃+50℃
Product Face Size (mm)	229.2*174.2*25.5
Energy Label Grade	C

INSTRUCTION


Instruction Manual	


PHOTOMETRIC DIAGRAMS

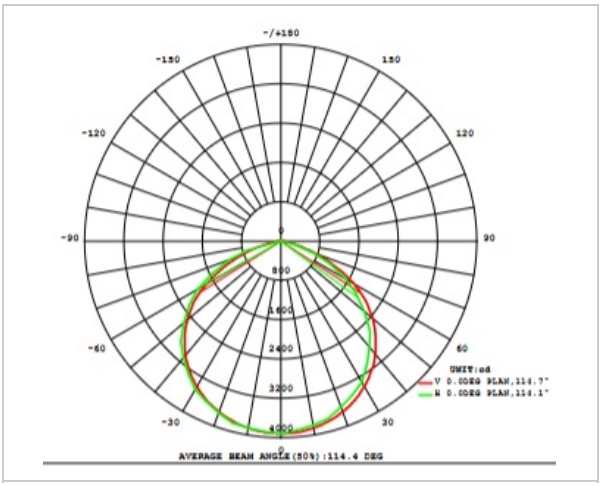

Beam angle / polar diagram

DIMENSION DRAWINGS

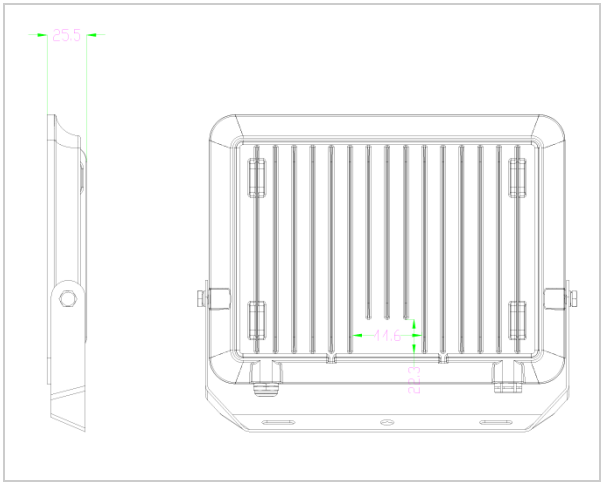

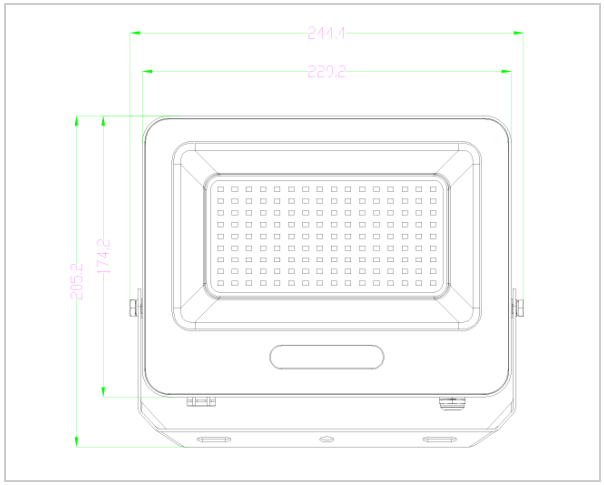

GENERAL INFORMATION

Body Material	Aluminum
Diffuser	Frosted
Mounting Type	Adjustable Mounting Bracket

APPLICATION AREAS

- Hotels and Resorts: hotel and villa entrances, driveways, gardens and outdoor common areas
- Commercial & Public Areas: parking areas, playgrounds, building façades and service areas
- Industrial & Logistics Areas: outdoor yards, loading areas, garages, workshops and utility zones















