







DOWNLIGHT(RECESSED LENS) 10W SERIES ARTIVIA - 075H LOOX PLUS

OVERVIEW

The ARTIVIA Recessed Lens Downlight is a compact architectural luminaire designed to provide controlled, comfortable illumination with a clean ceiling appearance. Its recessed optical design helps reduce direct glare and maintain visual comfort, making it well suited to hospitality, residential and commercial interiors such as corridors, entrances, reception areas and feature zones.

PRODUCT VARIANTS & TECHNICAL DATA

Code	Type / Description	Wattage(W)	Total Luminous Flux(lm)	Luminous Efficacy(lm/W)	Power Factor(pf)	Beam Angle	CRI (Ra)	IP Rating
LD187H0G103 LD187H0G104	3000K / 4000K, Gray, Down Light, Eaglerise Driver, Without Sensor	10W	1000	100	>0.5	36°	>90	54


TECHNICAL INFORMATION

Frequency	50-60 Hz
Input Voltage	220-240 VAC
Life Span	50000 H
Protection class	Class II
SDCM	≤ 2
Ambient temperature(Ta)	-15℃+55℃
Operating temperature	-15℃+45℃
UGR	<17
Product Face Size (mm)	Ø88 × H45 mm
Product Weight (gr)	207
Energy Usage	A+
Lumen Maintenance (L70)	1000


INSTRUCTION

Instruction Manual	

PHOTOMETRIC DIAGRAMS

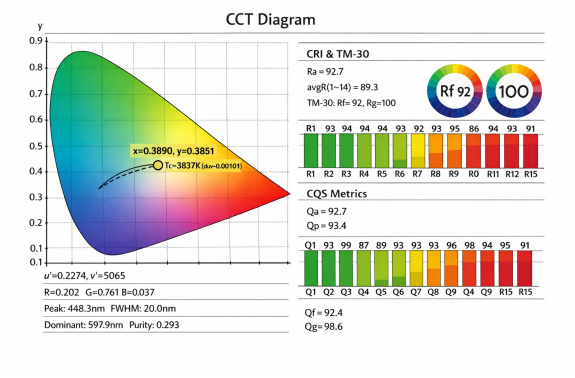


Chromaticity / CCT diagram



Beam angle / polar diagram

DIMENSION DRAWINGS

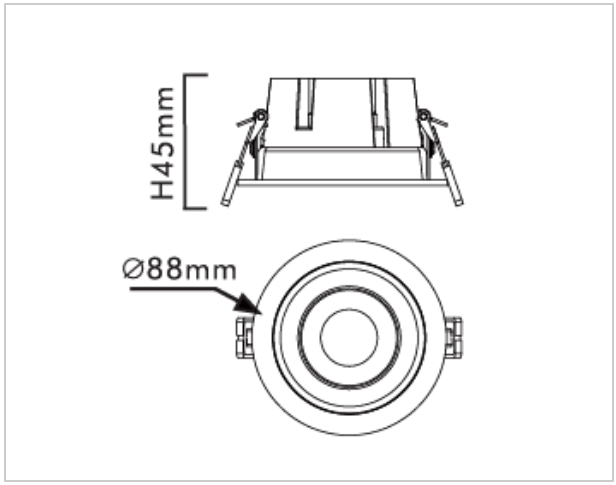

GENERAL INFORMATION

Body Material	Die-Cast Aluminum
Mounting Type	Recessed
Cut Size	Φ75mm
Driver Brand	Eaglerise/Philips
Chip Brand	Osram/Bridgelux
LED Type	COB

APPLICATION AREAS

- Hospitality: Hotel Corridors, Lift Lobbies, Reception Areas, Waiting Zones, Guest-Floor Circulation
- Residential Building: Living-room Feature Areas, Entrance Zones, Artwork, Display Cabinets
- Commercial Buildings: Reception Areas, Entrance Halls, Internal Corridors, Waiting Areas, Lift Lobbies

5 YEARS GUARANTEE
ISO 9001:2015
ISO 14001:2015
CE
CB
RoHS
صنع في عمان
Made in Oman