

Garden Light Mushroom Design IP65



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max

Number of LEDs

24 LEDs SMD

Luminous Flux

273LM (3000K)


Main Material

Aluminum

Color Temperature



3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

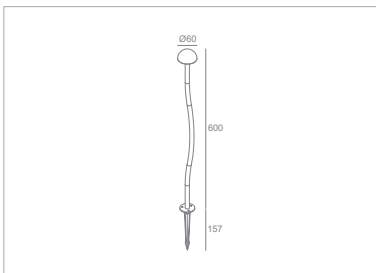


Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.

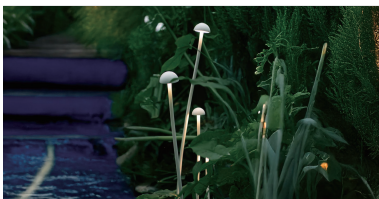

Product Model No.	MG-TY-0081A-1	
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs



5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



Garden Light



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max

Number of LEDs

24 LEDs SMD

Luminous Flux

273LM (3000K)


Main Material

Aluminum

Color Temperature


3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

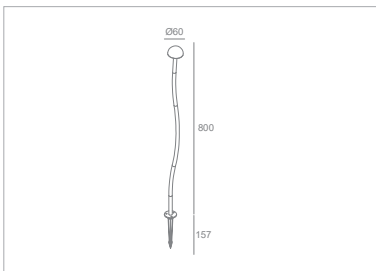

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0081A-2	
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs

5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
273LM (3000K)

Main Material
Aluminum



Color Temperature
3000K / 4000K / 6500K


CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

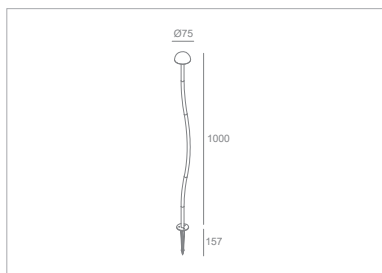

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.

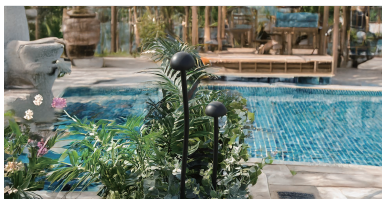


Product Model No.	MG-TY-0081A-3	
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs

5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	5.5W±10% Max

Number of LEDs

24 LEDs SMD

Luminous Flux

273LM (3000K)


Main Material

Aluminum

Color Temperature


3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

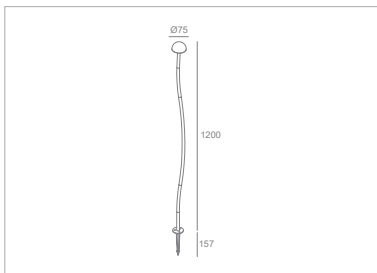


Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0081A-4	
Packaging Detail	126×17×14cm	
	STD PKG	4pcs
	N.W	1.57kgs
	G.W	2.57kgs



5.5W LED 3000K 273lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265 V~ 50/60 Hz 0.5A



Warm White 3000K ∠110°

	1m	108.53lx	210.76cm
	2m	27.13lx	421.51cm
	3m	12.06lx	632.27cm
	4m	6.78lx	843.02cm
	5m	4.34lx	1053.78cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



Recommended hot selling combinations▼



combination①

