

SMD Garden Light Mushroom Design IP65





TECHNICAL SPECIFICATIONS	
Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
456LM (3000K)	


Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

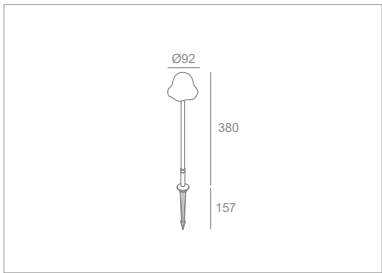


Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.

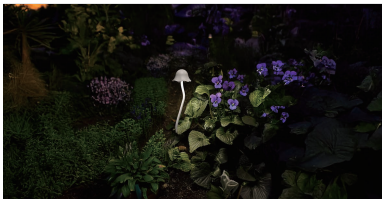

Product Model No.	MG-TY-0150A-380	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
	cd	Height	illuminance

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
456LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

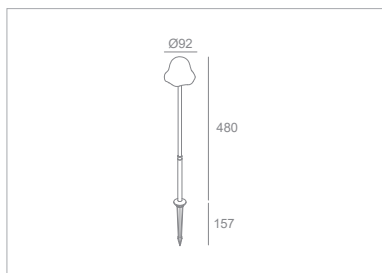

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.

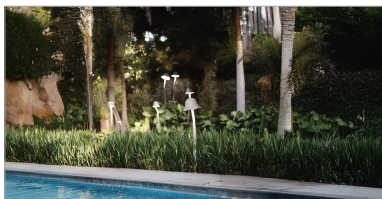


Product Model No.	MG-TY-0150A-480	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
456LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

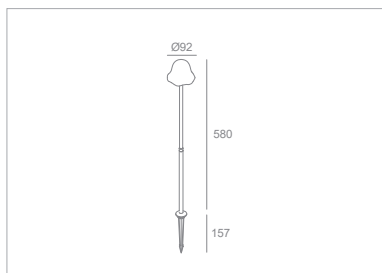

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.




Product Model No.	MG-TY-0150A-580	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
456LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

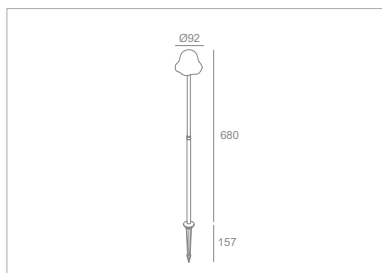

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.




Product Model No.	MG-TY-0150A-680	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs

24 LEDs SMD

Luminous Flux

456LM (3000K)


Main Material

Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

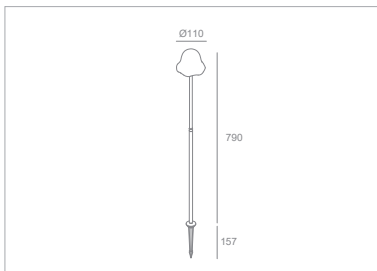

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.




Product Model No.	MG-TY-0150A-790	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	90-265V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
456LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.6
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP65

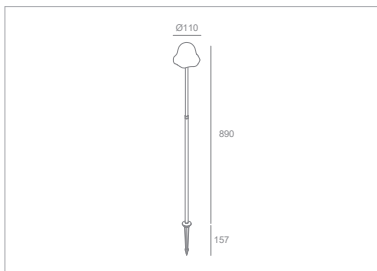

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.




Product Model No.	MG-TY-0150A-890	
Packaging Detail	101.5×32×22cm	
	STD PKG	6pcs
	N.W	2.27kgs
	G.W	3.27kgs

6W LED 3000K 456lm / incl. Driver SEC: Constant Current: DC1000mA DC24VDC /
PRI: 90-265V~ 50/60 Hz 0.25A



Warm White 3000K ∠110°

	1m	203.23lx	224.87cm
	2m	50.81lx	449.74cm
	3m	22.58lx	674.61cm
	4m	12.70lx	899.48cm
	5m	8.13lx	1124.35cm
cd	Height	illuminance	Diameter

Option colors





Various Brand of SMD LED Light Source:



Recommended hot selling combinations▼



combination①

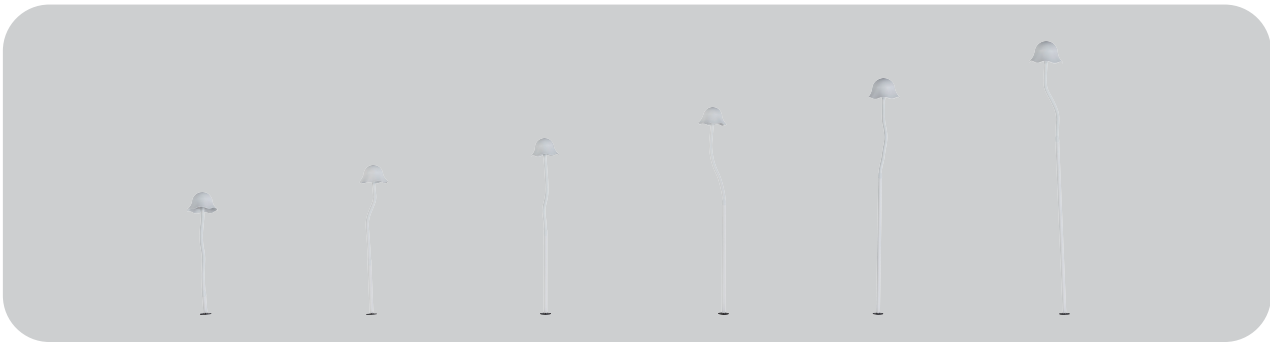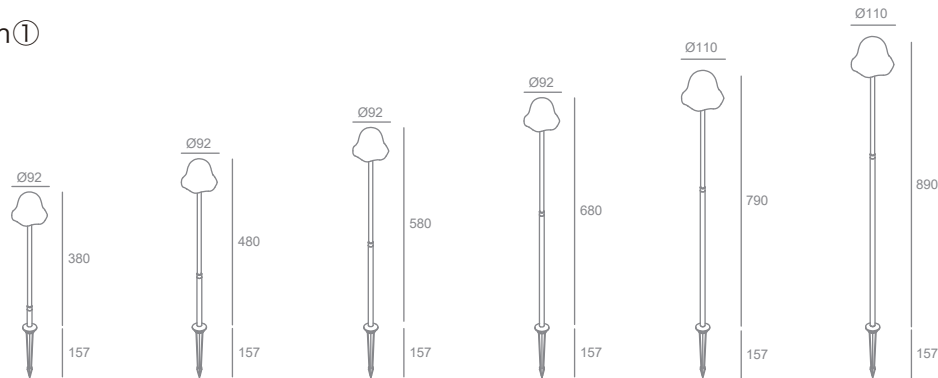

combination②

