

Garden Light Mushroom Design IP65



TECHNICAL SPECIFICATIONS

Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	4W±10% Max

Number of LEDs

36 LEDs SMD

Luminous Flux

395LM (3000K)

Main Material

Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9

Working Temperature -10°C~45°C

Beam Angle (Optional) 110°


Fixture Dimmable Non-dimmable

Electrical External Driver

Protection class IP65



Product Model No.	MG-TY-0110A-280-4W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs




4W LED 3000K 866lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



Warm White 3000K ∠110°

	1m	163.23lx	215.98cm
	2m	40.81lx	431.96cm
	3m	18.14lx	647.94cm
	4m	10.20lx	863.92cm
	5m	6.53lx	1079.90cm
cd	Height	illuminance	Diameter



Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Various Brand of SMD LED Light Source:






TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	4W±10% Max
Number of LEDs	36 LEDs SMD

Luminous Flux	395LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

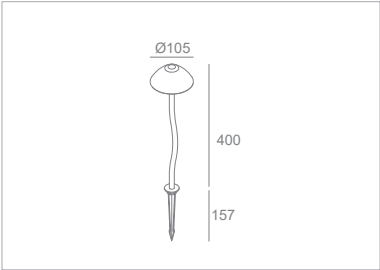

Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0110A-400-4W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs

4W LED 3000K 866lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



	1m	163.23lx	215.98cm
	2m	40.81lx	431.96cm
	3m	18.14lx	647.94cm
	4m	10.20lx	863.92cm
	5m	6.53lx	1079.90cm
	cd	Height	illuminance Diameter

Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----






TECHNICAL SPECIFICATIONS	
Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	4W±10% Max
Number of LEDs	36 LEDs SMD

Luminous Flux	395LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

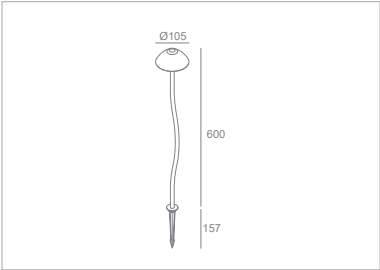



Especially designed for:
Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0110A-600-4W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs

4W LED 3000K 866lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



	1m	163.23lx	215.98cm
	2m	40.81lx	431.96cm
	3m	18.14lx	647.94cm
	4m	10.20lx	863.92cm
	5m	6.53lx	1079.90cm
	cd	Height	illuminance

Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----



TECHNICAL SPECIFICATIONS

Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	4W±10% Max


Number of LEDs
36 LEDs SMD

Luminous Flux
395LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K


CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

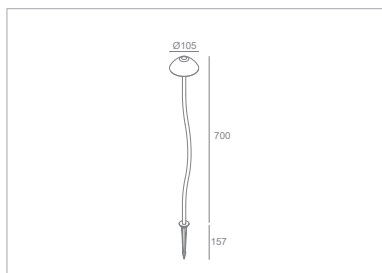

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.




Product Model No.	MG-TY-0110A-700-4W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs

4W LED 3000K 866lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



Warm White 3000K ∠110°

	1m	163.23lx	215.98cm
	2m	40.81lx	431.96cm
	3m	18.14lx	647.94cm
	4m	10.20lx	863.92cm
	5m	6.53lx	1079.90cm
cd	Height	illuminance	Diameter

Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	8.5W±10% Max


Number of LEDs
72 LEDs SMD

Luminous Flux
599LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

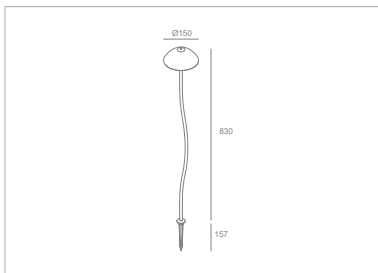


Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0110A-830-8.5W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs



8.5W LED 3000K 599lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



Warm White 3000K ∠110°

1m	266.68lx	237.51cm
2m	66.67lx	475.02cm
3m	29.63lx	712.52cm
4m	16.67lx	950.03cm
5m	10.67lx	1187.54cm
cd	Height	illuminance
		Diameter

Various Brand of SMD LED Light Source:



TECHNICAL SPECIFICATIONS

Input (Optional)	85-305V~50/60 Hz
Maximum Wattage	8.5W±10% Max


Number of LEDs	
72 LEDs SMD	

Luminous Flux	
599LM (3000K)	

Main Material	
Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

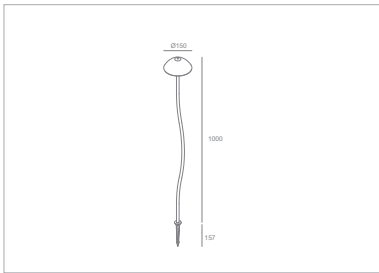

Especially designed for:

Outdoor patio lighting, great for landscape, swimming pool, garden, square, illuminating pathways, flower beds, trees, fences, driveways, stone walls, doorways, and etc.



Product Model No.	MG-TY-0110A-830-8.5W	
Packaging Detail	107.5×41×22cm	
	STD PKG	6pcs
	N.W	2.47kgs
	G.W	3.47kgs

8.5W LED 3000K 599lm / incl. Driver SEC: Constant Current: DC900mA
DC24-40VDC / PRI: 85-305V~ 50/60 Hz



Warm White 3000K ∠110°

	1m	266.68lx	237.51cm
	2m	66.67lx	475.02cm
	3m	29.63lx	712.52cm
	4m	16.67lx	950.03cm
	5m	10.67lx	1187.54cm
cd	Height	illuminance	Diameter



Various Brand of SMD LED Light Source:



Recommended hot selling combinations▼



combination①

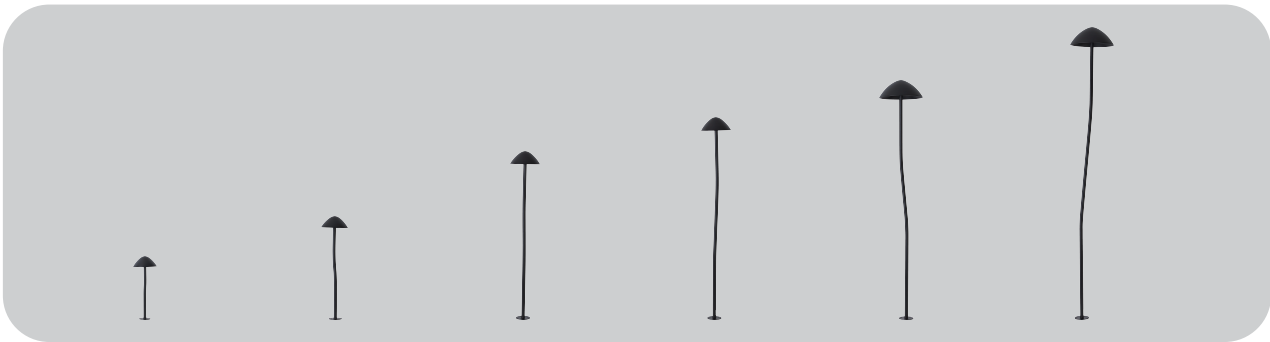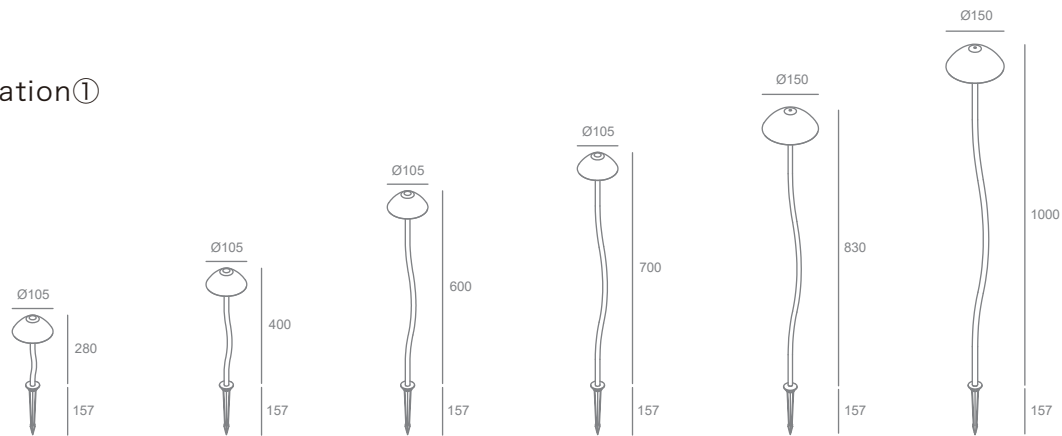

combination②

