

Decorative SMD Wall Lamp IP65



TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max


Number of LEDs
72 LEDs SMD

Luminous Flux
451LM (3000K)

Main Material
Aluminum & Glass


Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

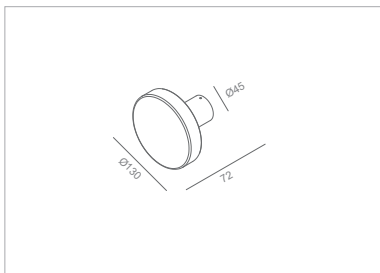

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	MG-BD-1690A- 12W	
Packaging Detail 	57.5X57.5X33.5CM	
	STD PKG	18pcs
	N.W	9.35kgs
	G.W	10.35kgs

12W LED 3000K 451lm / incl. Driver SEC: Constant Current: DC280mA DC24-42V /
PRI: 220-240 V~ 50/60 Hz 0.2A



Warm White 3000K ∠110°

	1m	417.19lx	99.50cm
	2m	104.30lx	199.00cm
	3m	46.35lx	298.50cm
	4m	26.07lx	397.99cm
	5m	16.69lx	497.49cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:

